





PACDT L12 4400-840 30W ETD DV | Art. No. 68812830.1031i86.300













490►














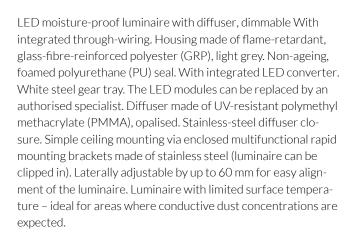

Ceiling mounting, wall mounting, for mounting directly on the ceiling or wall, With bracket on ceiling or wall (vertical or horizontal), Suspended with mounting bracket and hanger

for use indoors and in covered outdoor areas

· Basic lighting

Technical specifications		
Art. No.	68812830.1031i86.300	
Article name	PACDT L12 4400-840 30W ETD DV	
Light source	LED, replaceable by an authorised specialist	
Energy efficiency class(es) of the installed light source(s) (A–G)	Module 1: C	
Gear	LED converter, replaceable by an authorised specialist	
Number of light sources	1	
Dimmable	DALI dimmable	
Mains voltage	220-240V/50-60Hz	
Voltage type	AC/DC	
Max. connected load	31 W	
Output/power factor	0,90	
Luminous efficacy, max. current draw	142 lm/W	
Luminous flux, max.	4400 lm	
Flicker value (ripple)	<=2 %	
Colour temperature max.	4000 K	
Colour rendering index Ra	Ra > 80	
Colour tolerance (MacAdam)	3	
Life expectancy	60000 h	
Lifetime rating	L80/B10	
Light optics	Diffuser made of UV-resistant polymethyl methacrylate (PMMA)	
Light distribution	Extensive	
Beam angle	120°	





PACDT L12 4400-840 30W ETD DV | Art. No. 68812830.1031i86.300

Technical specifications	
Unified Glare Rating UGR - max 4H- 8H	27
Connection type	5-pin push-fit connector with plug-in contact
Number of luminaires on circuit breaker B16	22 Piece
Housing	Housing made of flame-retardant, glass-fibre-reinforced polyester (GRI
Cable entry (position)	front
Halogen-free wiring	true
Through-wiring	with through-wiring 5x2.5 sq mm
Ambient operating temperature – min.	-20 °C
Ambient operating temperature – max.	25 °C
Testing	
Protection class	SCI
Protection grade	IP65
Information about protection grade	The protection grade is only guaranteed at the factory if mounted using the enclosed mounting bracket
Shock resistance	IK03
Flammability (UL94)	НВ
Glow-wire resistance	PMMA 650°C
CE-compliant	Yes
D marking	Yes
Certified for the food industry (HACCP)	Yes
Mass and weight	
Length (L)	1220 mm
Width (B)	90 mm
Height (H)	105 mm
Fixing span (E1)	880 mm
Fixing span (E2) sliding fit, mounting bracket	760 mm
Information about protection grade	The protection grade is only guaranteed at the factory if mounted using the enclosed mounting bracket
Gross weight (including packaging)	2,03 Kg
Net weight	1,74 Kg
Contents / packaging quantity	1 Piece





PACDT L12 4400-840 30W ETD DV | Art. No. 68812830.1031i86.300

Accessories (optional)



Art. No.	Article name
36078001	Wire mesh protection SG 136



Art. No.	Article name
44149022	TRX chain, galvanised



Art. No.	Article name
35960980	Closure KIT, plastic PAC-D



Art. No.	Article name
35962270	TRA KIT TRA Clip Typ PACD - 35962270