



**Rondo-Lite 360 1000-840 9W ETC** | Art. No. 87636009.1081t80.000

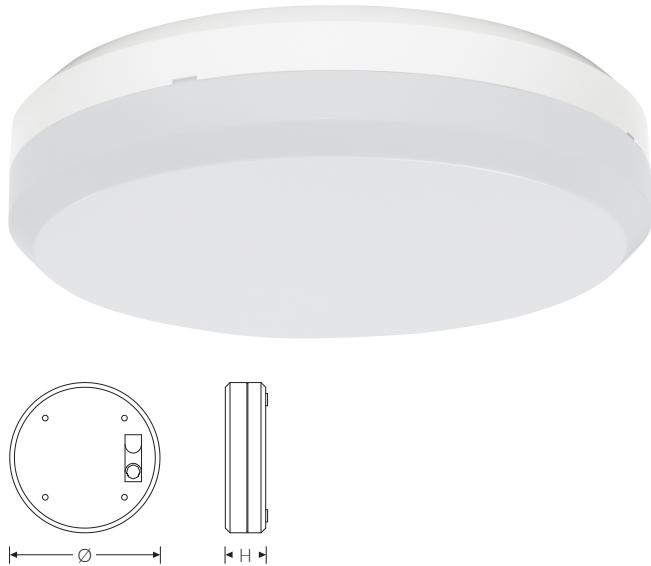

LED universal surface-mounted luminaire IP65, built-in LED modules and LED gear. Polycarbonate (PC) housing, diffuser/cover made from acrylic (PMMA), opal. Cable entry and gland for mains cable on the underside. Internal 3-pin push-fit connector. Approved for indoor or covered outdoor use, for ceiling and wall mounting (see mounting instructions).

Type of installation and area of application
Ceiling and wall mounting for use indoors and in covered outdoor areas • Basic lighting

#### Technical specifications

Art. No.	87636009.1081t80.000
Article name	Rondo-Lite 360 1000-840 9W ETC
Light source	LED, replaceable by an authorised specialist
Energy efficiency class(es) of the installed light source(s) (A–G)	Module 1: C
Gear	LED converter, replaceable by an authorised specialist
Number of light sources	1
Dimmable	not dimmable
Mains voltage	220-240V/50-60Hz
Voltage type	AC/DC
Max. connected load	9 W
Output/power factor	0,85
Luminous efficacy, max. current draw	111 lm/W
Luminous flux, max.	1000 lm
Flicker value (ripple)	<= 5%
Colour temperature max.	4000 K
Colour rendering index Ra	Ra > 80
Colour tolerance (MacAdam)	3
Life expectancy	72000 h
Lifetime rating	L80/B10
Light optics	Diffuser made of UV-resistant polymethyl methacrylate (PMMA)
Light distribution	Extensive
Beam angle	120°

Rondo-Lite 360 1000-840 9W ETC | Art. No. 87636009.1081t80.000

**Technical specifications**

Unified Glare Rating UGR – max 4H – 8H	25
Connection type	3-pin push-fit connector with plug-in contact
Number of luminaires on circuit breaker B16	37 Piece
Housing	Housing made of flame-retardant polycarbonate (PC)
Cable entry (position)	rear
Ambient operating temperature – min.	-20 °C
Ambient operating temperature – max.	25 °C

**Testing**

Protection class	SC I
Protection grade	IP65
Shock resistance	IK03
Flammability (UL94)	HB
Glow-wire resistance	PMMA 650°C
CE-compliant	Yes
<b>Mass and weight</b>	
Diameter	360 mm
Height (H)	90 mm
Gross weight (including packaging)	2,2 Kg
Net weight	2 Kg
Contents / packaging quantity	1 Piece

Rondo-Lite 360 1000-840 9W ETC | Art. No. 87636009.1081t80.000

The values stated are design values. Unless otherwise stated, the values apply to an ambient temperature of 25°C. Photometric values are subject to a general tolerance of +10%. The technical contents correspond to the status at the time of printing. Subject to changes and errors.

**LTT Leuchten-Technik Tettnang**  
Hermannstadtstr. 1 | 88069 Tettnang  
Tel: +49 7542 5304-0  
info@ltt-licht.de | [www.ltt-licht.de](http://www.ltt-licht.de)

Page: 3 | 3