


PAC-D 258 for LED Tube D V2A-C HV | Art. No. 681258.031.001.0.00



Illustration similar

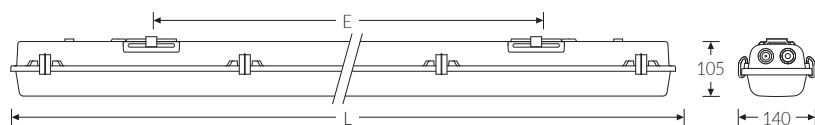

PMMA
650°C

IK03

HB



Moisture-proof luminaire with diffuser for LED tube. Short-circuit protection thanks to built-in micro-fuse. Luminaire base made of glass-fibre-reinforced polyester, light grey, flame retardant. Diffuser made of UV-resistant polymethyl methacrylate (PMMA), pearled. Stainless-steel diffuser closure. Multifunctional rapid installation with stainless-steel mounting bracket (luminaire can be clipped in). Laterally adjustable by up to 60 mm for easy alignment of the luminaire.

Type of installation and area of application

With bracket on ceiling or wall (vertical or horizontal), Suspended with mounting bracket and hanger, Trunking TRA for use indoors and in covered outdoor areas

- Basic lighting

Technical specifications

Art. No.	681258.031.001.0.00
Article name	PAC-D 258 for LED Tube D V2A-C HV
Light source	LEDtube
Socket / base	G13 / T8 (26)
Number of light sources	2
Dimmable	not dimmable
Mains voltage	230V/50Hz
Voltage type	AC
Luminaire efficiency	96 %
Light optics	Diffuser made of UV-resistant polymethyl methacrylate (PMMA)
Connection type	3-pin push-fit connector with screw contact
Housing	Housing made of flame-retardant, glass-fibre-reinforced polyester (GRP)
Cable entry (position)	front

Testing


Protection class	SC I
Protection grade	IP65
Information about protection grade	The protection grade is only guaranteed at the factory if mounted using the enclosed mounting bracket
Shock resistance	IK03
Flammability (UL94)	HB
Glow-wire resistance	PMMA 650°C
CE-compliant	Yes
D marking	Yes

PAC-D 258 for LED Tube D V2A-C HV | Art. No. 681258.031.001.0.00

Testing	
Certified for the food industry (HACCP)	Yes
Mass and weight	
Length (L)	1585 mm
Width (B)	140 mm
Height (H)	105 mm
Fixing span (E1)	1180 mm
Fixing span (E2) sliding fit, mounting bracket	1060 mm
Information about protection grade	The protection grade is only guaranteed at the factory if mounted using the enclosed mounting bracket
Gross weight (including packaging)	3,4 Kg
Net weight	3,2 Kg
Contents / packaging quantity	1 Piece

PAC-D 258 for LED Tube D V2A-C HV | Art. No. 681258.031.001.0.00


Accessories (optional)



Art. No.	Article name
36078005	Wire mesh protection SG 258



Art. No.	Article name
44149022	TRX chain, galvanised



Art. No.	Article name
35960980	Closure KIT, plastic PAC-D



Art. No.	Article name
35962280	TRA KIT TRA Clip LZP +PACD 258 - 35962280