




○ C € ⊕ **V IP65**

PAC-D 158 for LED Tube D V2A-HV | Art. No. 681158.031.001.0.00

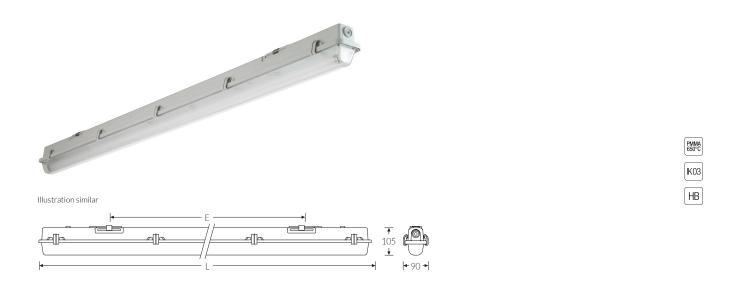

Moisture-proof luminaire with diffuser for LED tube. Short-circuit protection thanks to built-in micro-fuse. Luminaire base made of glass-fibre-reinforced polyester, light grey, flame retardant. Diffuser made of UV-resistant polymethyl methacry-late (PMMA), pearled. Stainless-steel diffuser closure. Multifunctional rapid installation with stainless-steel mounting bracket (luminaire can be clipped in). Laterally adjustable by up to 60 mm for easy alignment of the luminaire.

Type of	inctallation	and area	of application
TVDE OF	IIIStaliation	anu area	OI ADDIICATION

With bracket on ceiling or wall (vertical or horizontal), Suspended with mounting bracket and hanger, Trunking TRA $\,$

for use indoors and in covered outdoor areas

Basic lighting

Technical specifications		
Art. No.	681158.031.001.0.00	
Article name	PAC-D 158 for LED Tube D V2A-HV	
Light source	LEDtube	
Socket / base	G13/T8 (26)	
Number of light sources	1	
Dimmable	not dimmable	
Mains voltage	230V/50Hz	
Voltage type	AC	
Luminaire efficiency	96%	
Light optics	Diffuser made of UV-resistant poly- methyl methacrylate (PMMA)	
Connection type	3-pin push-fit connector with screw contact	
Housing	Housing made of flame-retardant, glass-fibre-reinforced polyester (GRP)	
Cable entry (position)	front	
Testing		
Protection class	SC I	
Protection grade	IP65	
Information about protection grade	The protection grade is only guaran- teed at the factory if mounted using the enclosed mounting bracket	
Shock resistance	IK03	
Flammability (UL94)	НВ	
Glow-wire resistance	PMMA 650°C	
CE-compliant	Yes	
D marking	Yes	





PAC-D 158 for LED Tube D V2A-HV | Art. No. 681158.031.001.0.00

Testing	
Certified for the food industry (HACCP)	Yes
Mass and weight	
Length (L)	1570 mm
Width (B)	90 mm
Height (H)	105 mm
Fixing span (E1)	1180 mm
Fixing span (E2) sliding fit, mounting bracket	1060 mm
Information about protection grade	The protection grade is only guaran- teed at the factory if mounted using the enclosed mounting bracket
Gross weight (including packaging)	2,6 Kg
Net weight	2,4 Kg
Contents / packaging quantity	1 Piece





PAC-D 158 for LED Tube D V2A-HV | Art. No. 681158.031.001.0.00

Accessories (optional)



Art. No.	Article name
36078002	Wire mesh protection SG 158



Art. No.	Article name
44149022	TRX chain, galvanised



Art. No.	Article name
35960980	Closure KIT, plastic PAC-D



Art. No.	Article name
35962270	TRA KIT TRA Clip Typ PACD - 35962270